

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1N R1W

SEC 33

1/16

SEC 4

U.S.B.&M.

A-10


33

NORTH

SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 00°23'49" W	46.20'
L2	N 00°23'37" W	38.28'
L3	N 32°00'06" W	37.01'
L4	N 18°34'23" W	65.54'
L5	N 01°52'55" W	63.09'
L6	S 14°19'20" W	45.28'
L7	S 21°45'22" W	31.29'

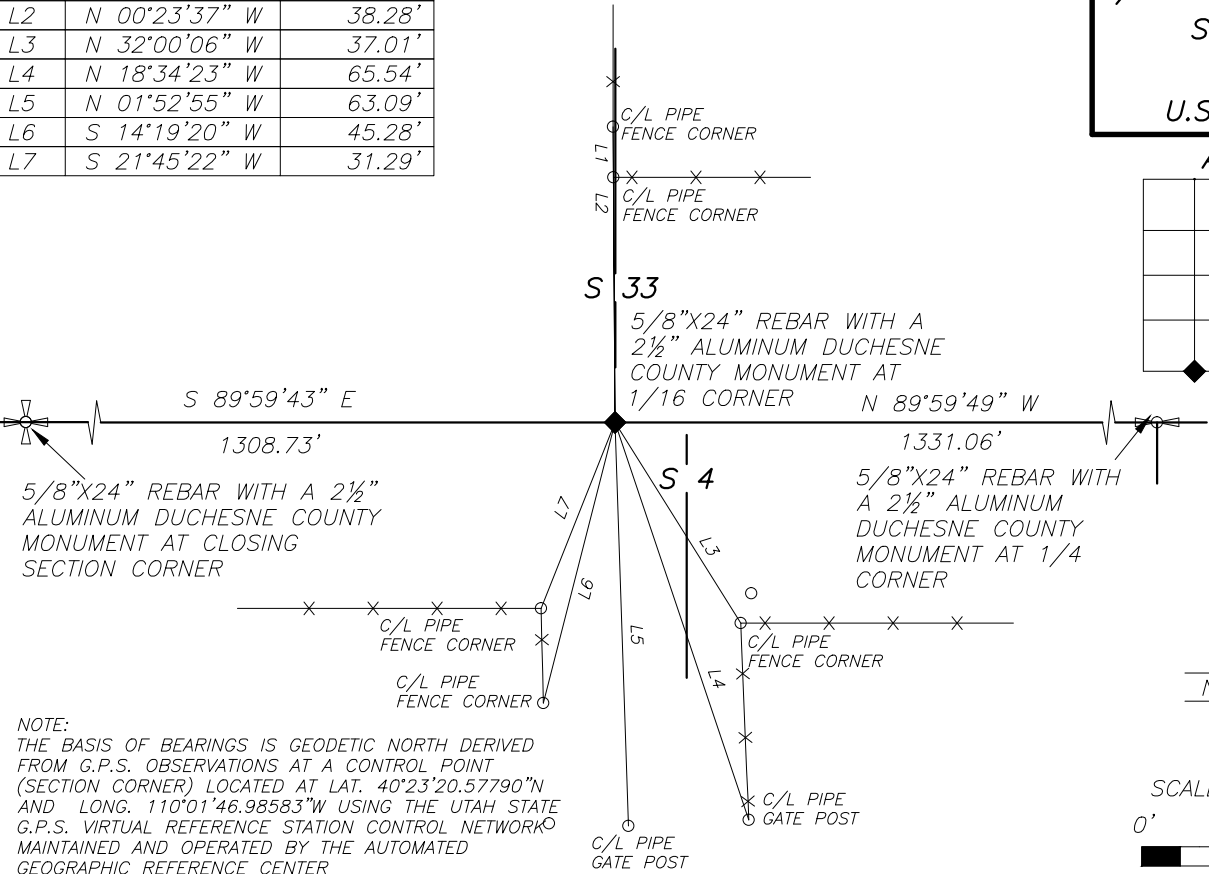

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°23'20.57790"N AND LONG. 110°01'46.98583"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A MAG SPIKE AND WASHER AT THE POSITION OF THE 1/16 CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8"X24" REBAR WITH A 2 1/2" ALUMINUM DUCHESNE COUNTY MONUMENT AT THE POSITION OF THE 1/16 CORNER AFTER ROAD CONSTRUCTION



STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7329907.155  
E: 2056180.725  
NAVD88 EL: 5983.30'

LATITUDE: 40°25'58.62484" N  
LONGITUDE: 110°00'22.96099" W  
ELLIPSOID HEIGHT: 5929.78'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300010N0010W0\_320100

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

